



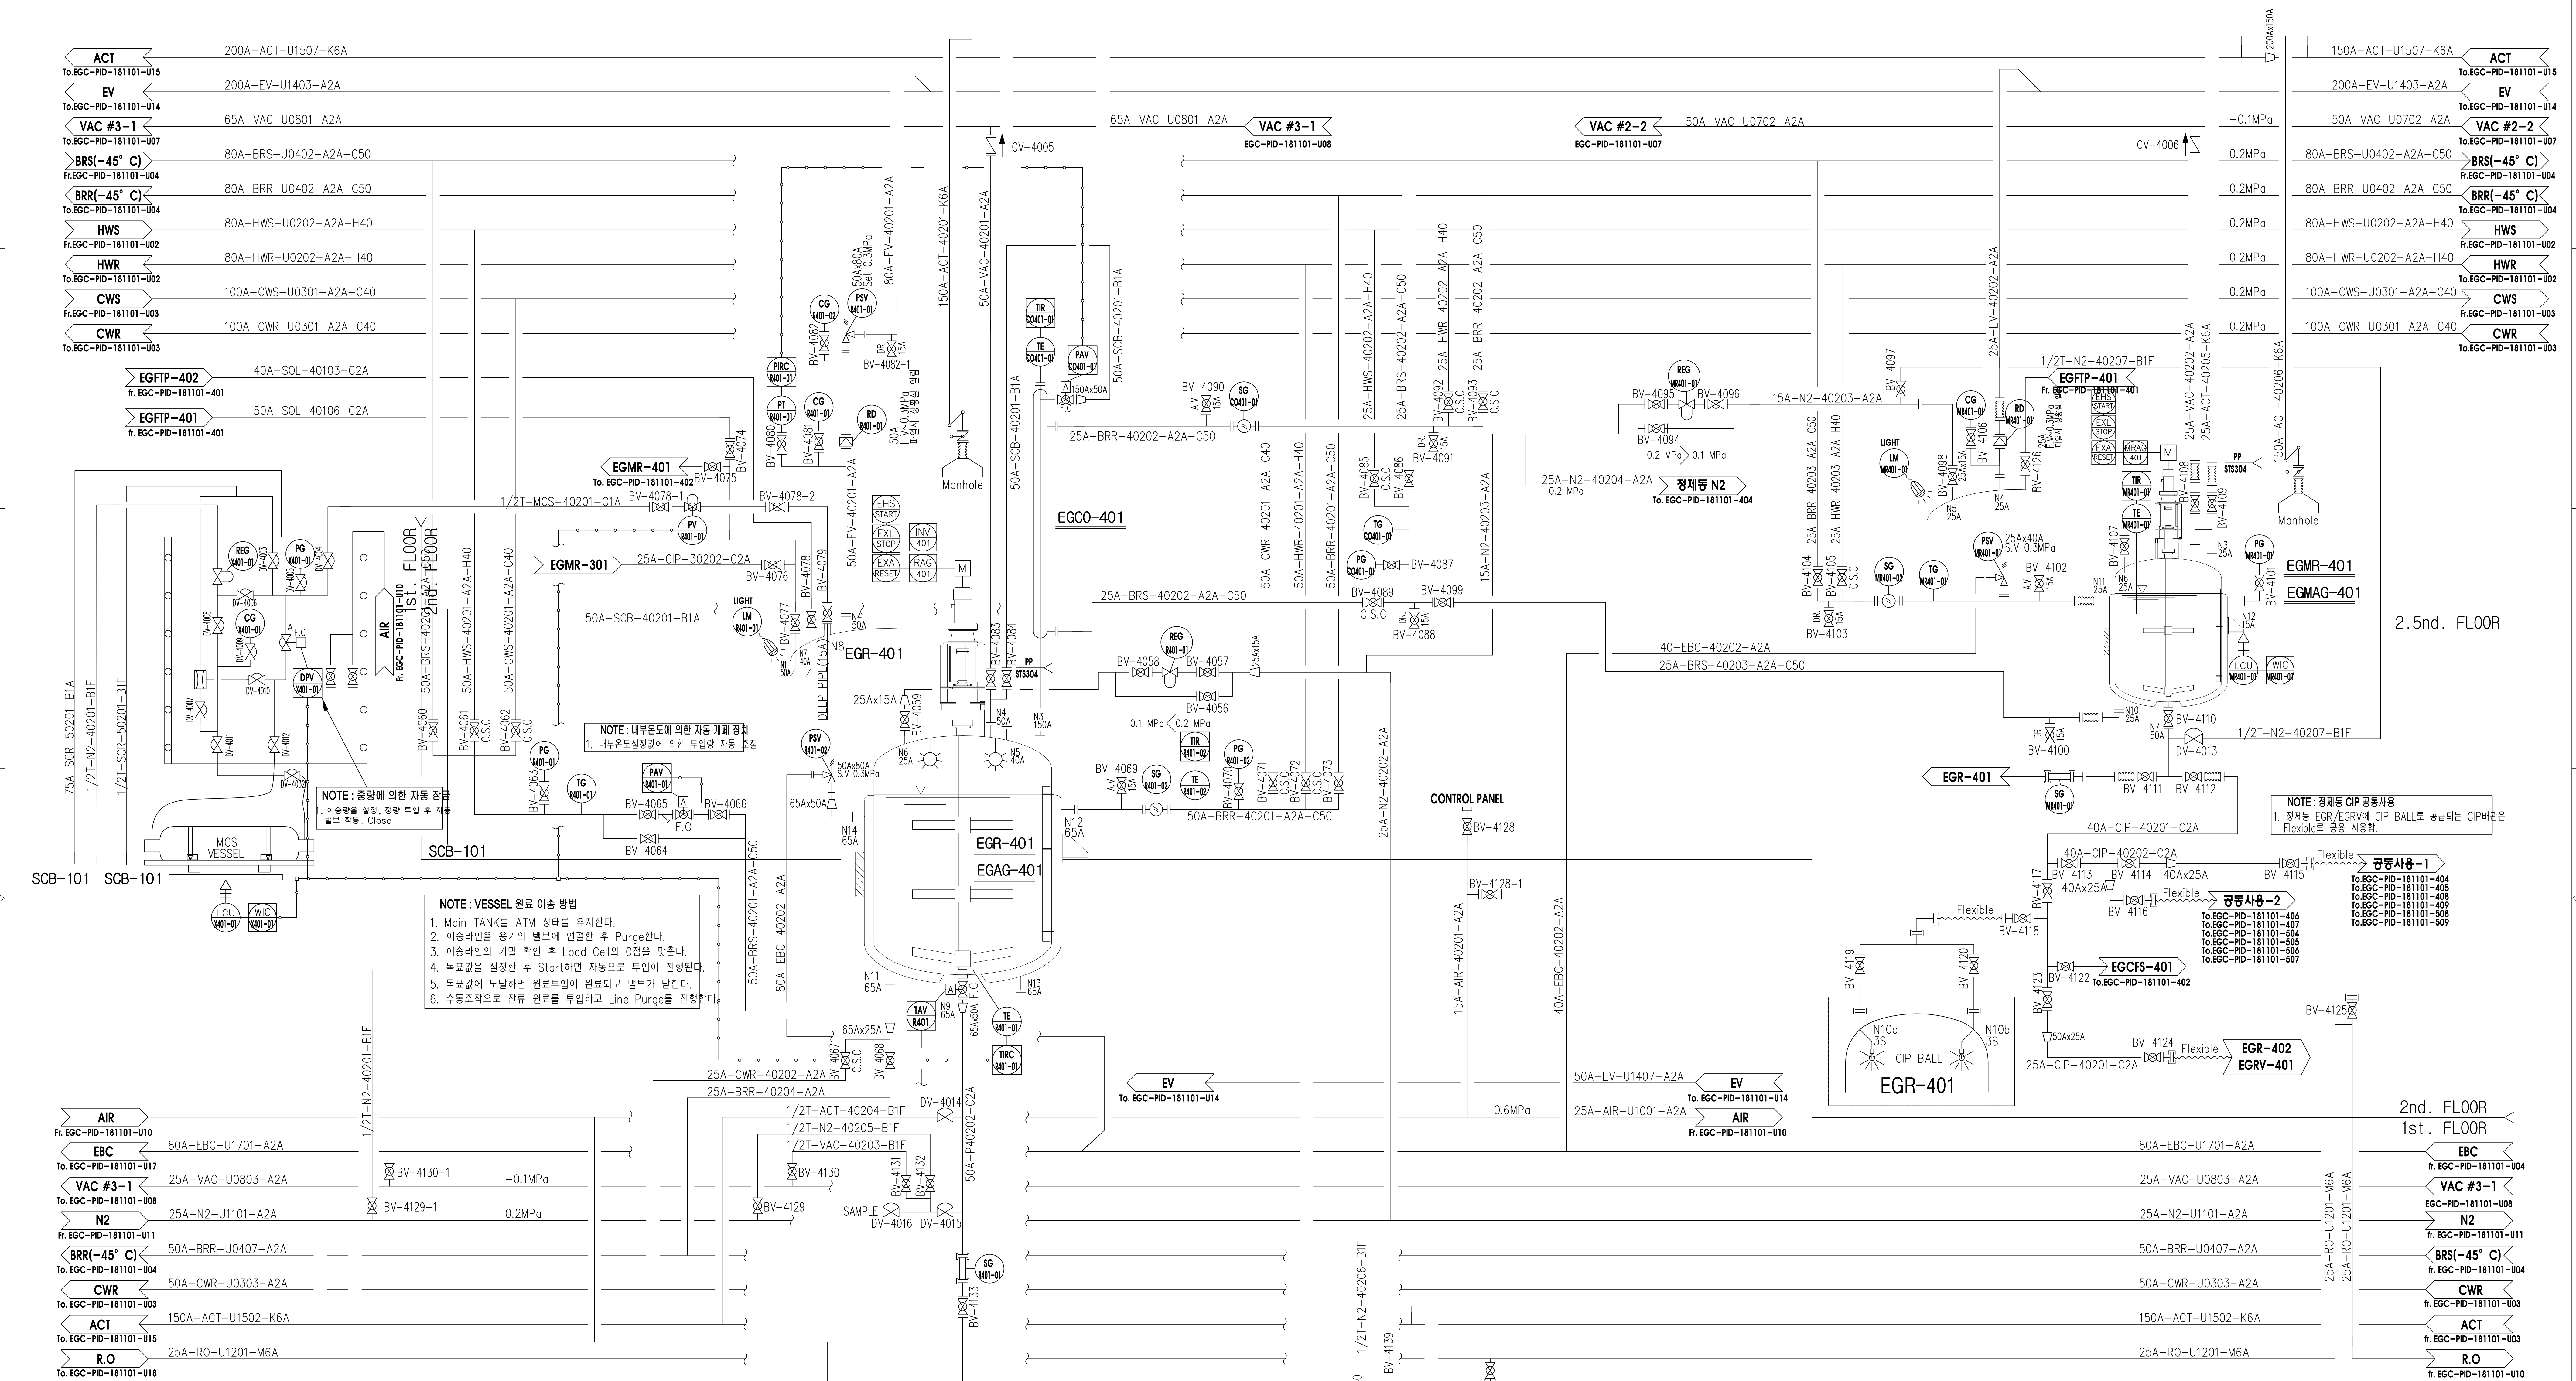

EFCFTP-401	EGCO-401	SCB-101	RT-101	NF-401, 402
MAGNETIC TRASFER PUMP	COLUMN	SCRUBBER	Recirculation Tank	Nutsche Filter
CAPA : 0.12 ^m /min x 20mH	SIZE : 150A x 200A	CAPA : STS316L / MP + EP	CAPA : 450L	CAPA : 1200 Liter
MAT'L : STS316L	MAT'L(S) : STS316L / MP + EP	TYPE : HEAT&WET	SIZE : 985(W)x800(D)x1342(H)	MAT'L : STS316L
POWER : 1.5kw x 2P x 380V	MAT'L(J) : STS304	SIZE : 1,100 x 1,350 x 2,000	System material : PVC	POWER : N/A
EXP. GRADE : Exd IIB T4	D.P(S/U) : F.V-0.3Mpa / 0.3Mpa	Heating temperature : 700~750℃	INLET / OUTLET : 16A PVC	D.P(S/U) : FV-0.18 MPA.
	D.T(S/U) : 40~150℃ / 40~150℃			D.T(S/U) : -30~150 ° C
EGR-401	EGAG-401	EGMR-401	EGMAG-401	
REACTOR	AGITATOR	REACTOR	AGITATOR	
CAPA : 3.0 ^m	MAT'L : STS316L / EP	CAPA : 0.3 ^m	MAT'L : STS316L / EP	
SIZE : Ø1500 x 1800H	RPM : 12 ~ 90 (1/20)	SIZE : Ø700 x 800H	RPM : 20 ~ 117 (1/15)	
MAT'L : STS316L / EP	POWER : 7.5kw x 380V x 4pole	MAT'L : STS316L / EP	POWER : 2.2kw x 380V x 4pole	
D.P(S/U) : F.V-0.3Mpa / 0.3Mpa	EXP. GRADE : Exd IIB T4	D.P(S/U) : F.V-0.2Mpa / 0.25Mpa	EXP. GRADE : Exd IIB T4	
D.T(S/U) : 70~150℃ / 70~150℃		D.T(S/U) : 20~80℃ / 20~80℃		

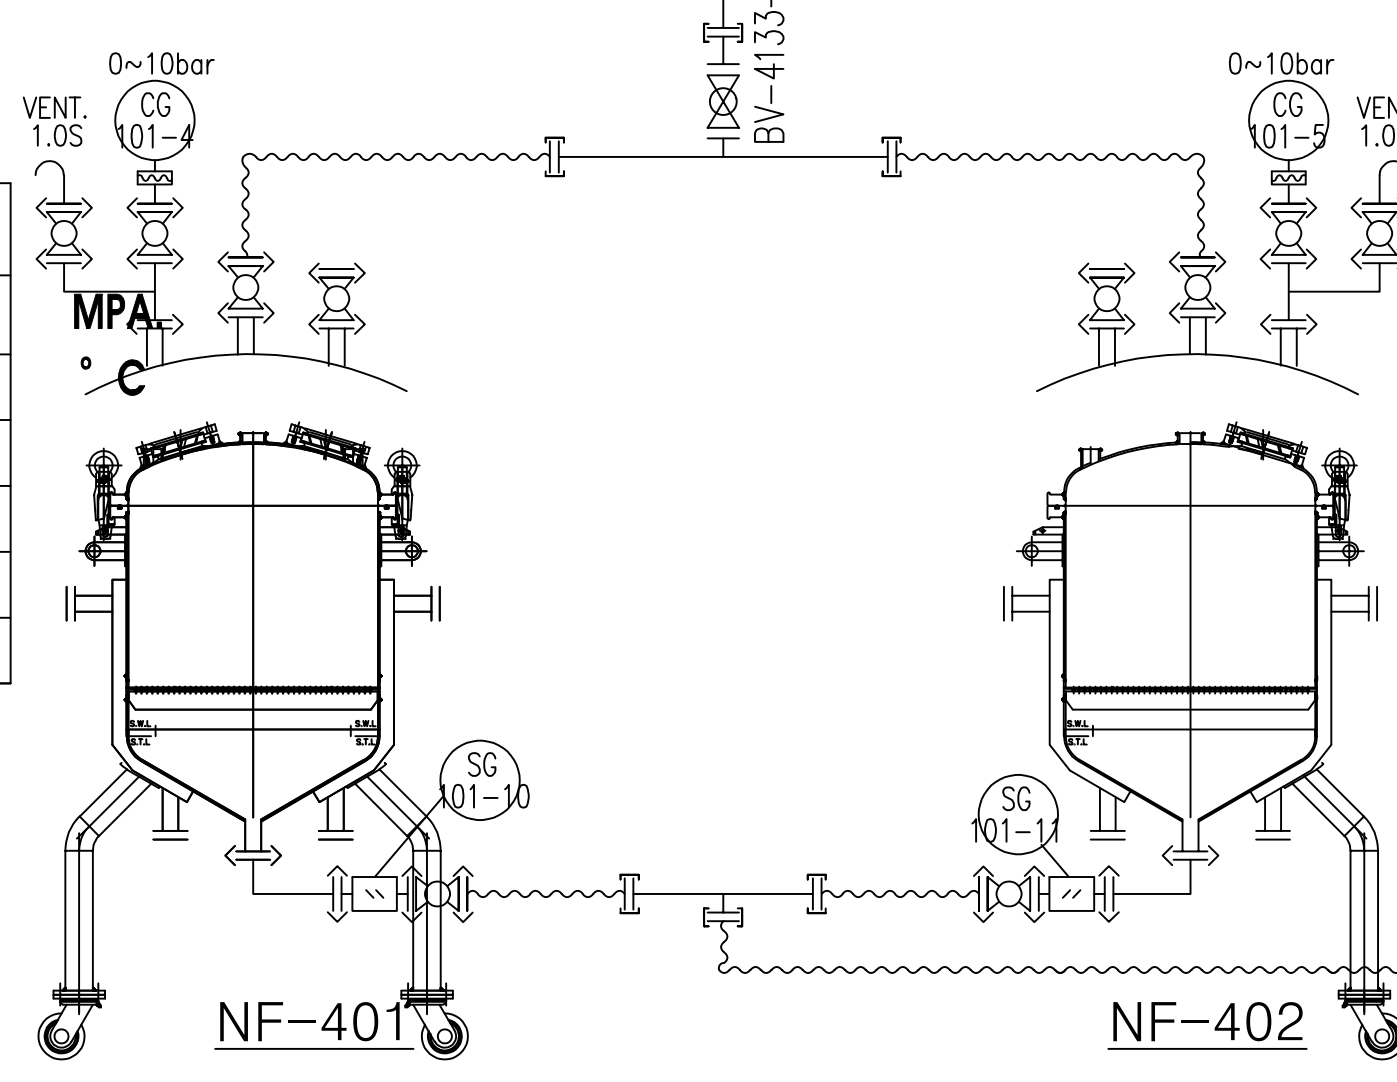

△	후후 리비전 기록 리비전기	2019.09.04	J.H LEE	J.H LEE	J.H LEE
△	배관 변경	2019.06.03	S.G LEE	J.J JIEONG	Y.J KIM
△	배관 변경	2019.05.13	S.G LEE	J.J JIEONG	Y.J KIM
△	REVISION	2019.04.22	S.G LEE	J.J JIEONG	Y.J KIM
△	REVISION	2019.04.15	S.G LEE	J.J JIEONG	Y.J KIM
△	for APPROVAL	2019.01.24	S.G LEE	J.J JIEONG	Y.J KIM
REV.	REVISIONS	DATE	DRAWN	CHK'D	APP'D
PROJECT NAME 공주공장 합성, 정제 증축공사					
CLIENT (주)이지캠					
PREPARED BY CT ENG Co.,Ltd.					
PROJECTION	TITLE P & ID (2/9-EGR401) BDEAS REACTION SYSTEM				
SCALE N.S	DATE 2018.11.14	DWG. NO EGC-PID-181101-402	REV.		