
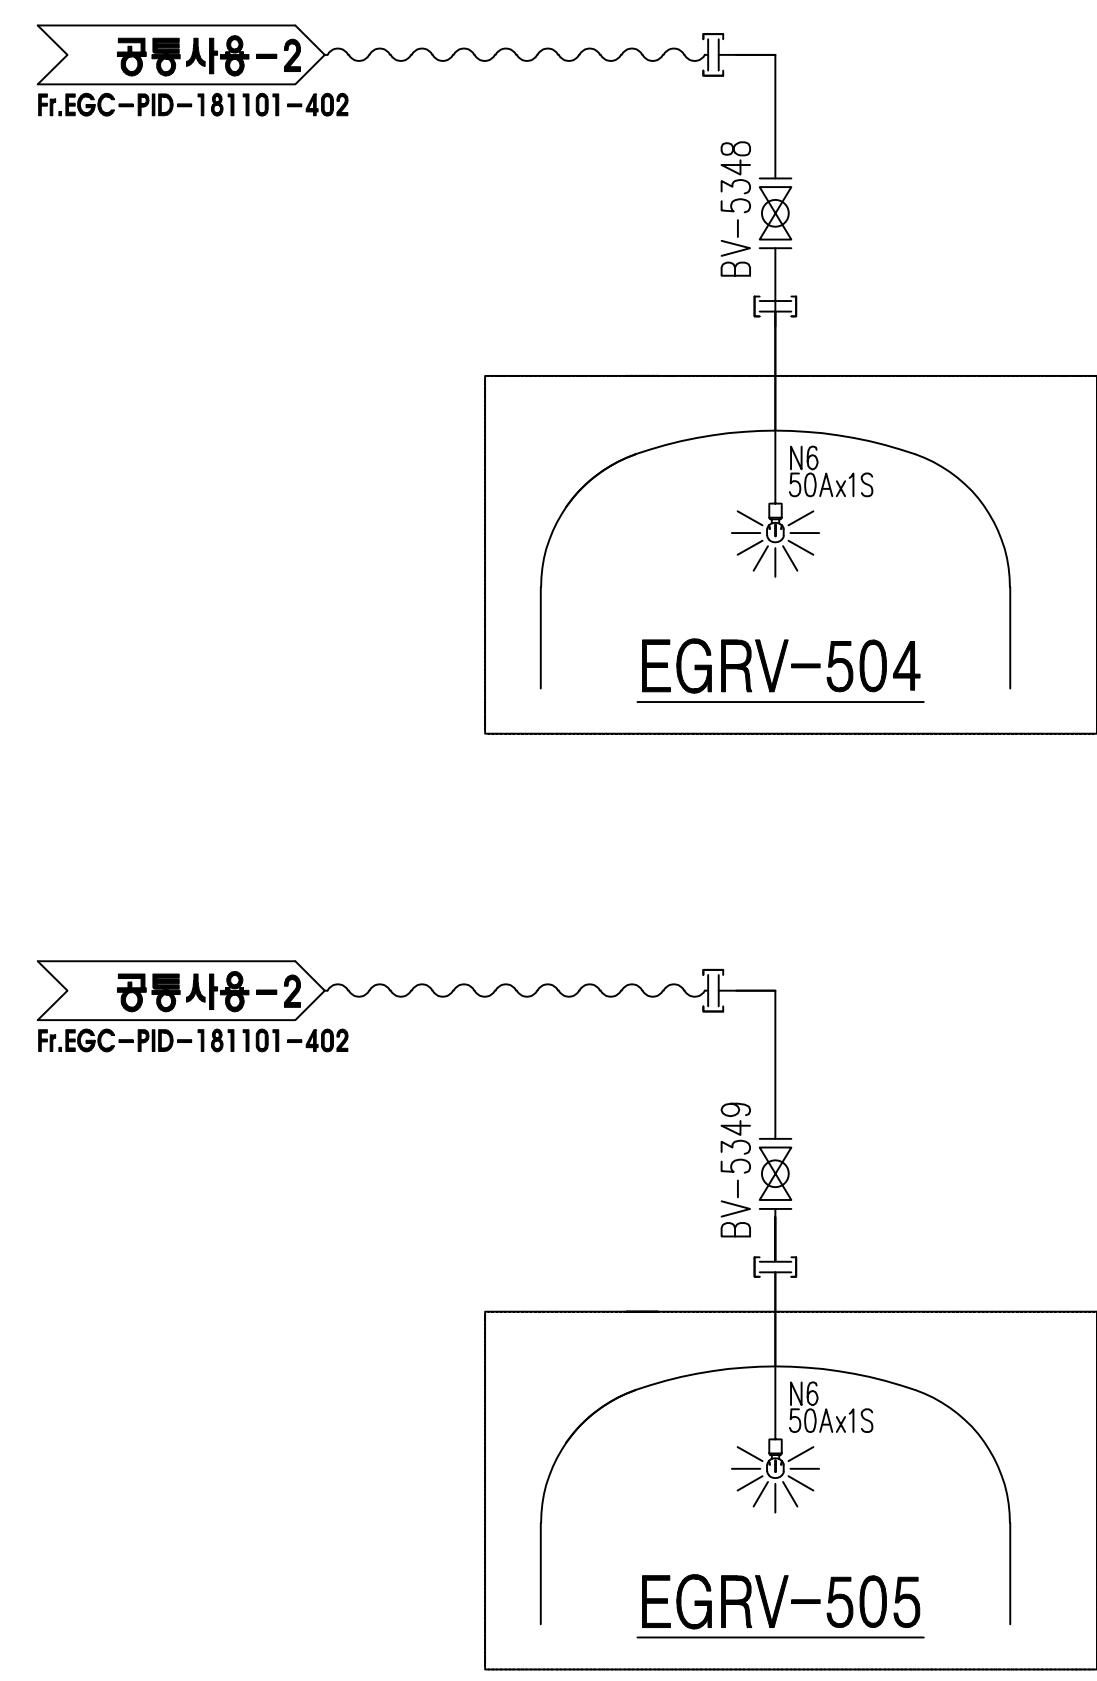
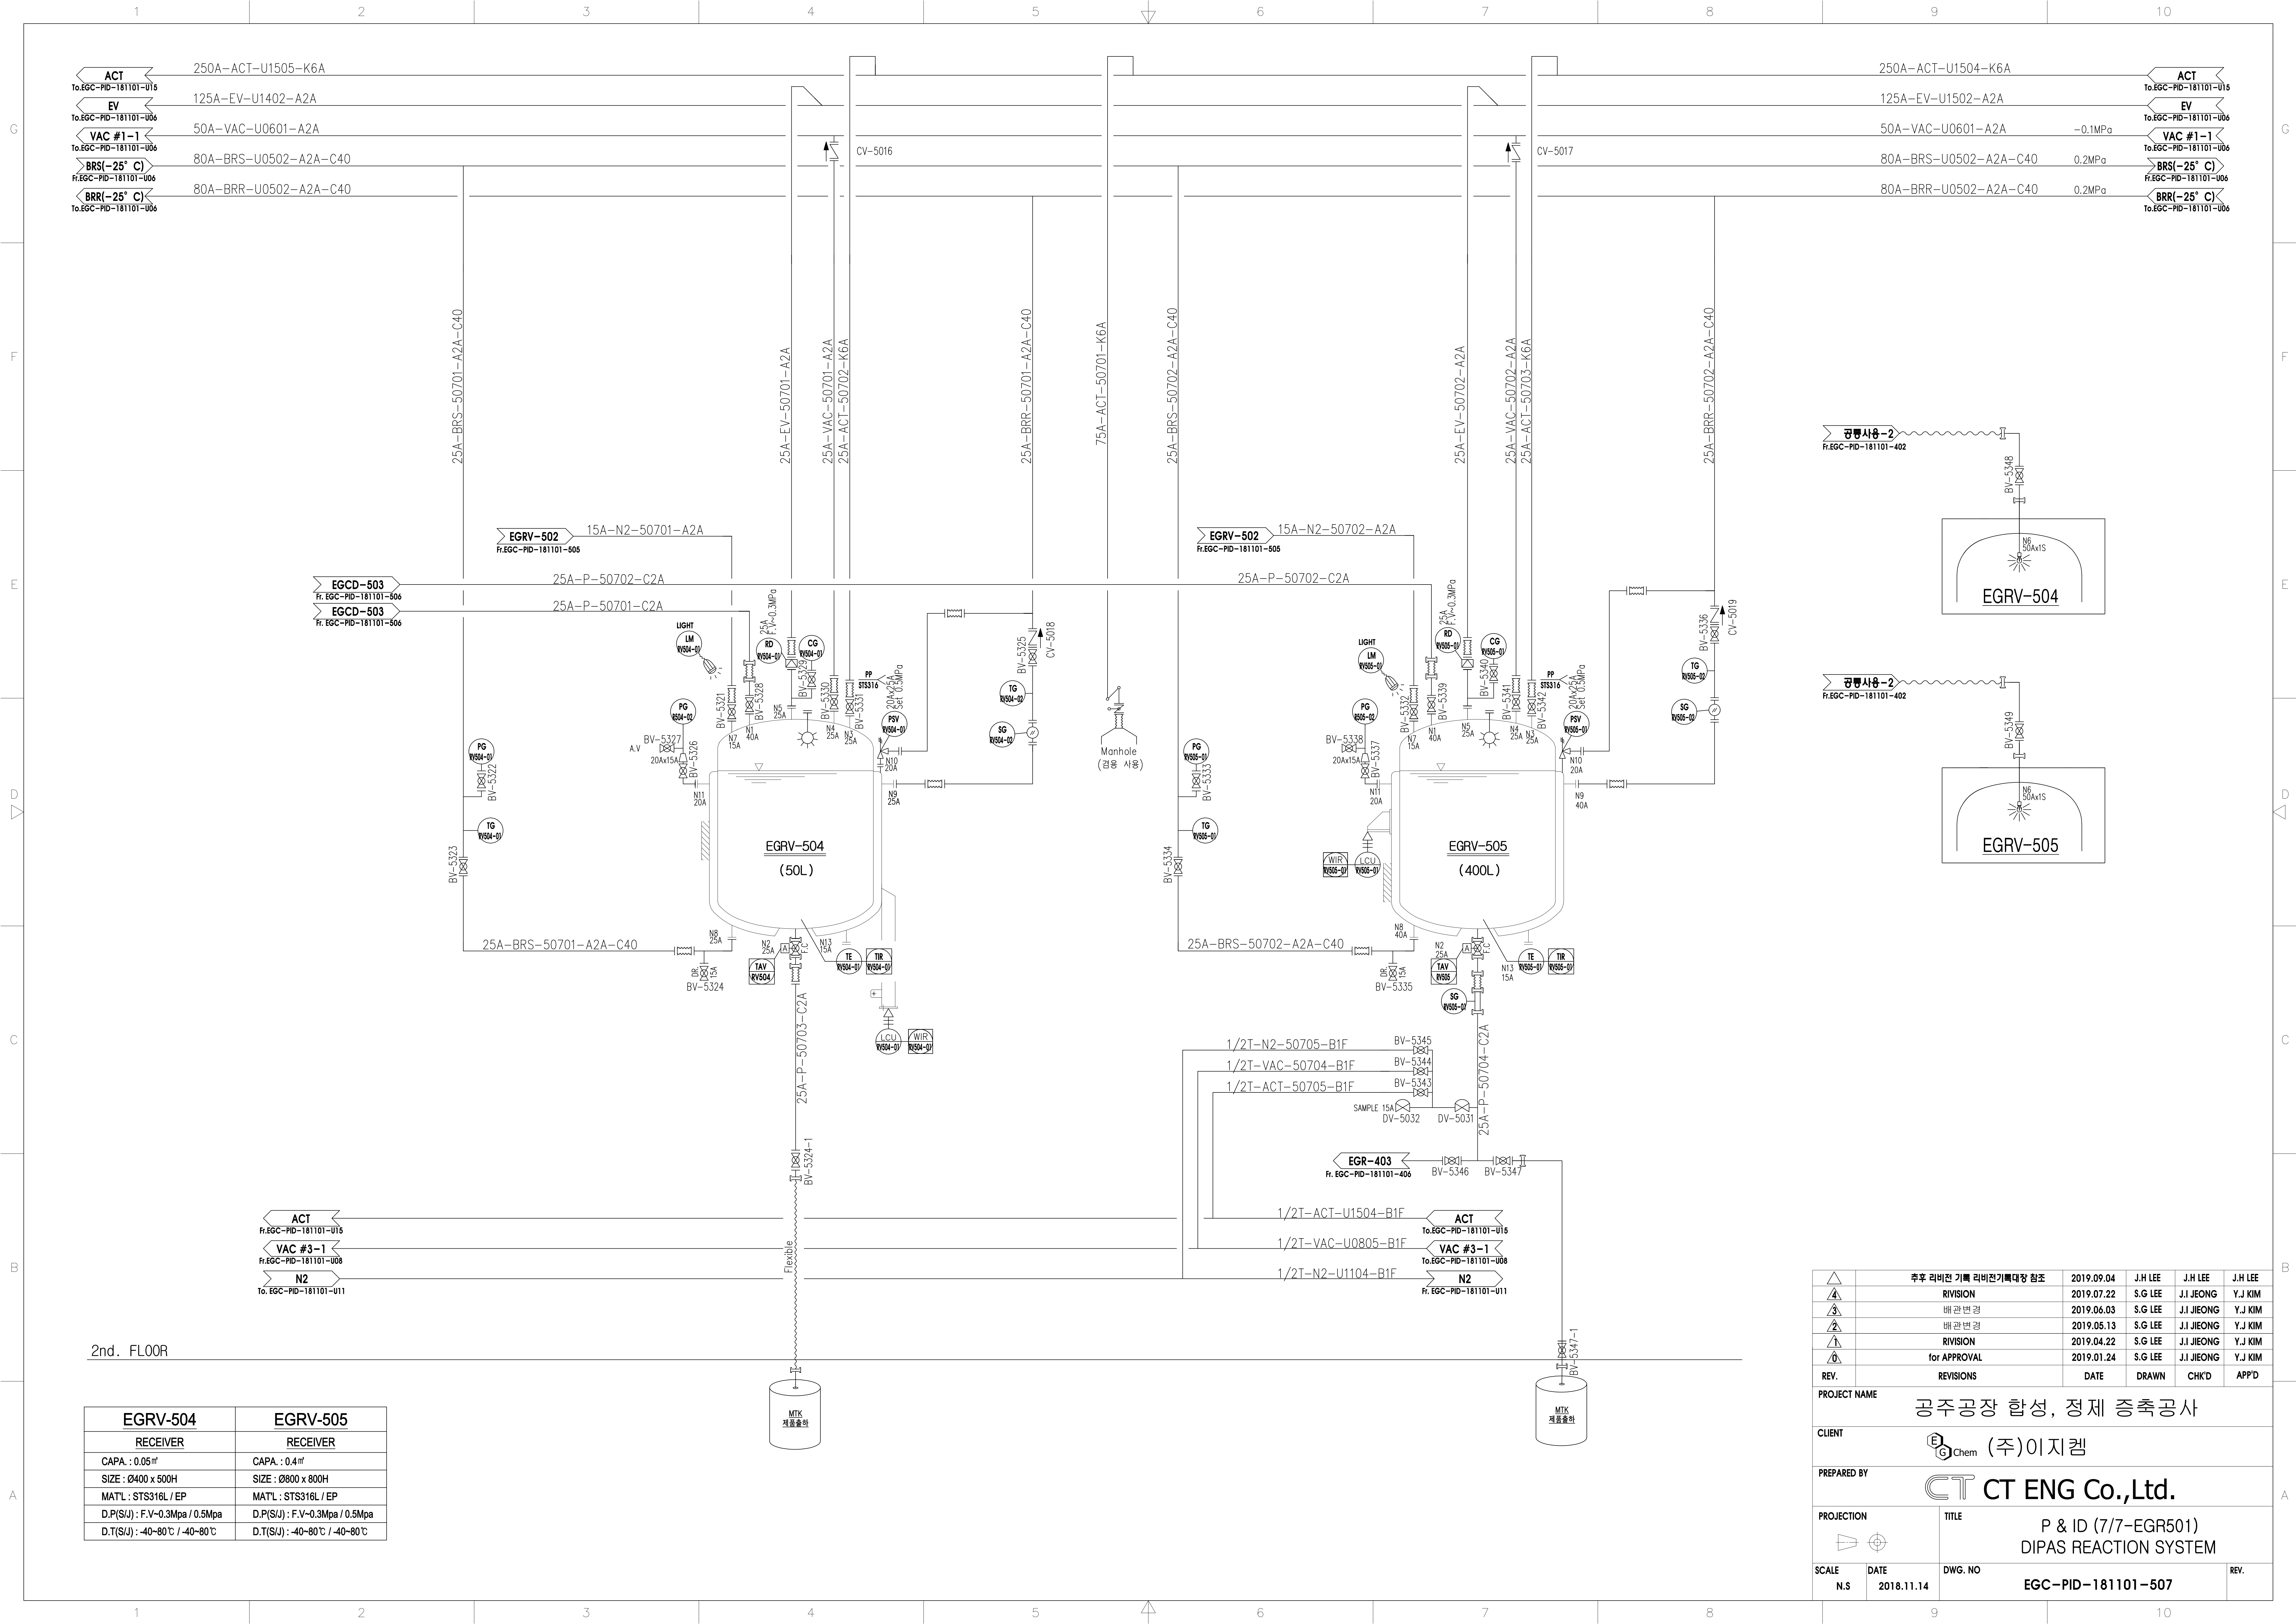






EGRV-504	EGRV-505
RECEIVER	RECEIVER
CAPA : 0.05m ³	CAPA : 0.4m ³
SIZE : Ø400 x 500H	SIZE : Ø800 x 800H
MATL : STS316L / EP	MATL : STS316L / EP
D.P(S/U) : F.V-0.3Mpa / 0.5Mpa	D.P(S/U) : F.V-0.3Mpa / 0.5Mpa
D.T(S/U) : -40~80℃ / -40~80℃	D.T(S/U) : -40~80℃ / -40~80℃

△	주요 리비전 기록 리비전기법대장 참조	2019.09.04	J.H LEE	J.H LEE	J.H LEE
④	RIVISION	2019.07.22	S.G LEE	J.I JEONG	Y.J KIM
③	배관변경	2019.06.03	S.G LEE	J.I JEONG	Y.J KIM
②	배관변경	2019.05.13	S.G LEE	J.I JEONG	Y.J KIM
①	RIVISION	2019.04.22	S.G LEE	J.I JEONG	Y.J KIM
①	for APPROVAL	2019.01.24	S.G LEE	J.I JEONG	Y.J KIM
REV.	REVISIONS	DATE	DRAWN	CHK'D	APP'D
PROJECT NAME 공주공장 합성, 정제 증축공사					
CLIENT  (주)이지캠					
PREPARED BY  CT ENG Co.,Ltd.					
PROJECTION 		TITLE P & ID (7/7-EGR501) DIPAS REACTION SYSTEM			
SCALE N.S	DATE 2018.11.14	DWG. NO EGC-PID-181101-507	REV.		